

Underpinning Tasker Street



» **FORCINE**

Forcine Concrete

1875 Church Rd.
Malvern, PA 19355
610-647-0614

Bruce Wilson

VP of Business Development
bwilson@rwshotcrete.com
215-783-8876



1850s church

This historic 1850s church was being upgraded to a modern brewery. The existing basement ceiling height was 5'6", but the new use required a height of 11'0". Construction was further complicated by restricted site access into the church and existing foundation walls of friable stacked stone.

Problem




Underpins with shotcrete

The interior wall was reinforced and stiffened with an 8" shotcrete lining. Underpins were then installed using 400 CY of structural shotcrete, placed without forms, bracing, or grout joints. No dry pack grout joint was required due to the perfect interface of shotcrete to the existing wall. Four heavily loaded brick columns were also reinforced by encapsulating with structural shotcrete, shoring underneath, and shooting them in place.

Solution

Traditional depiction of underpin segments

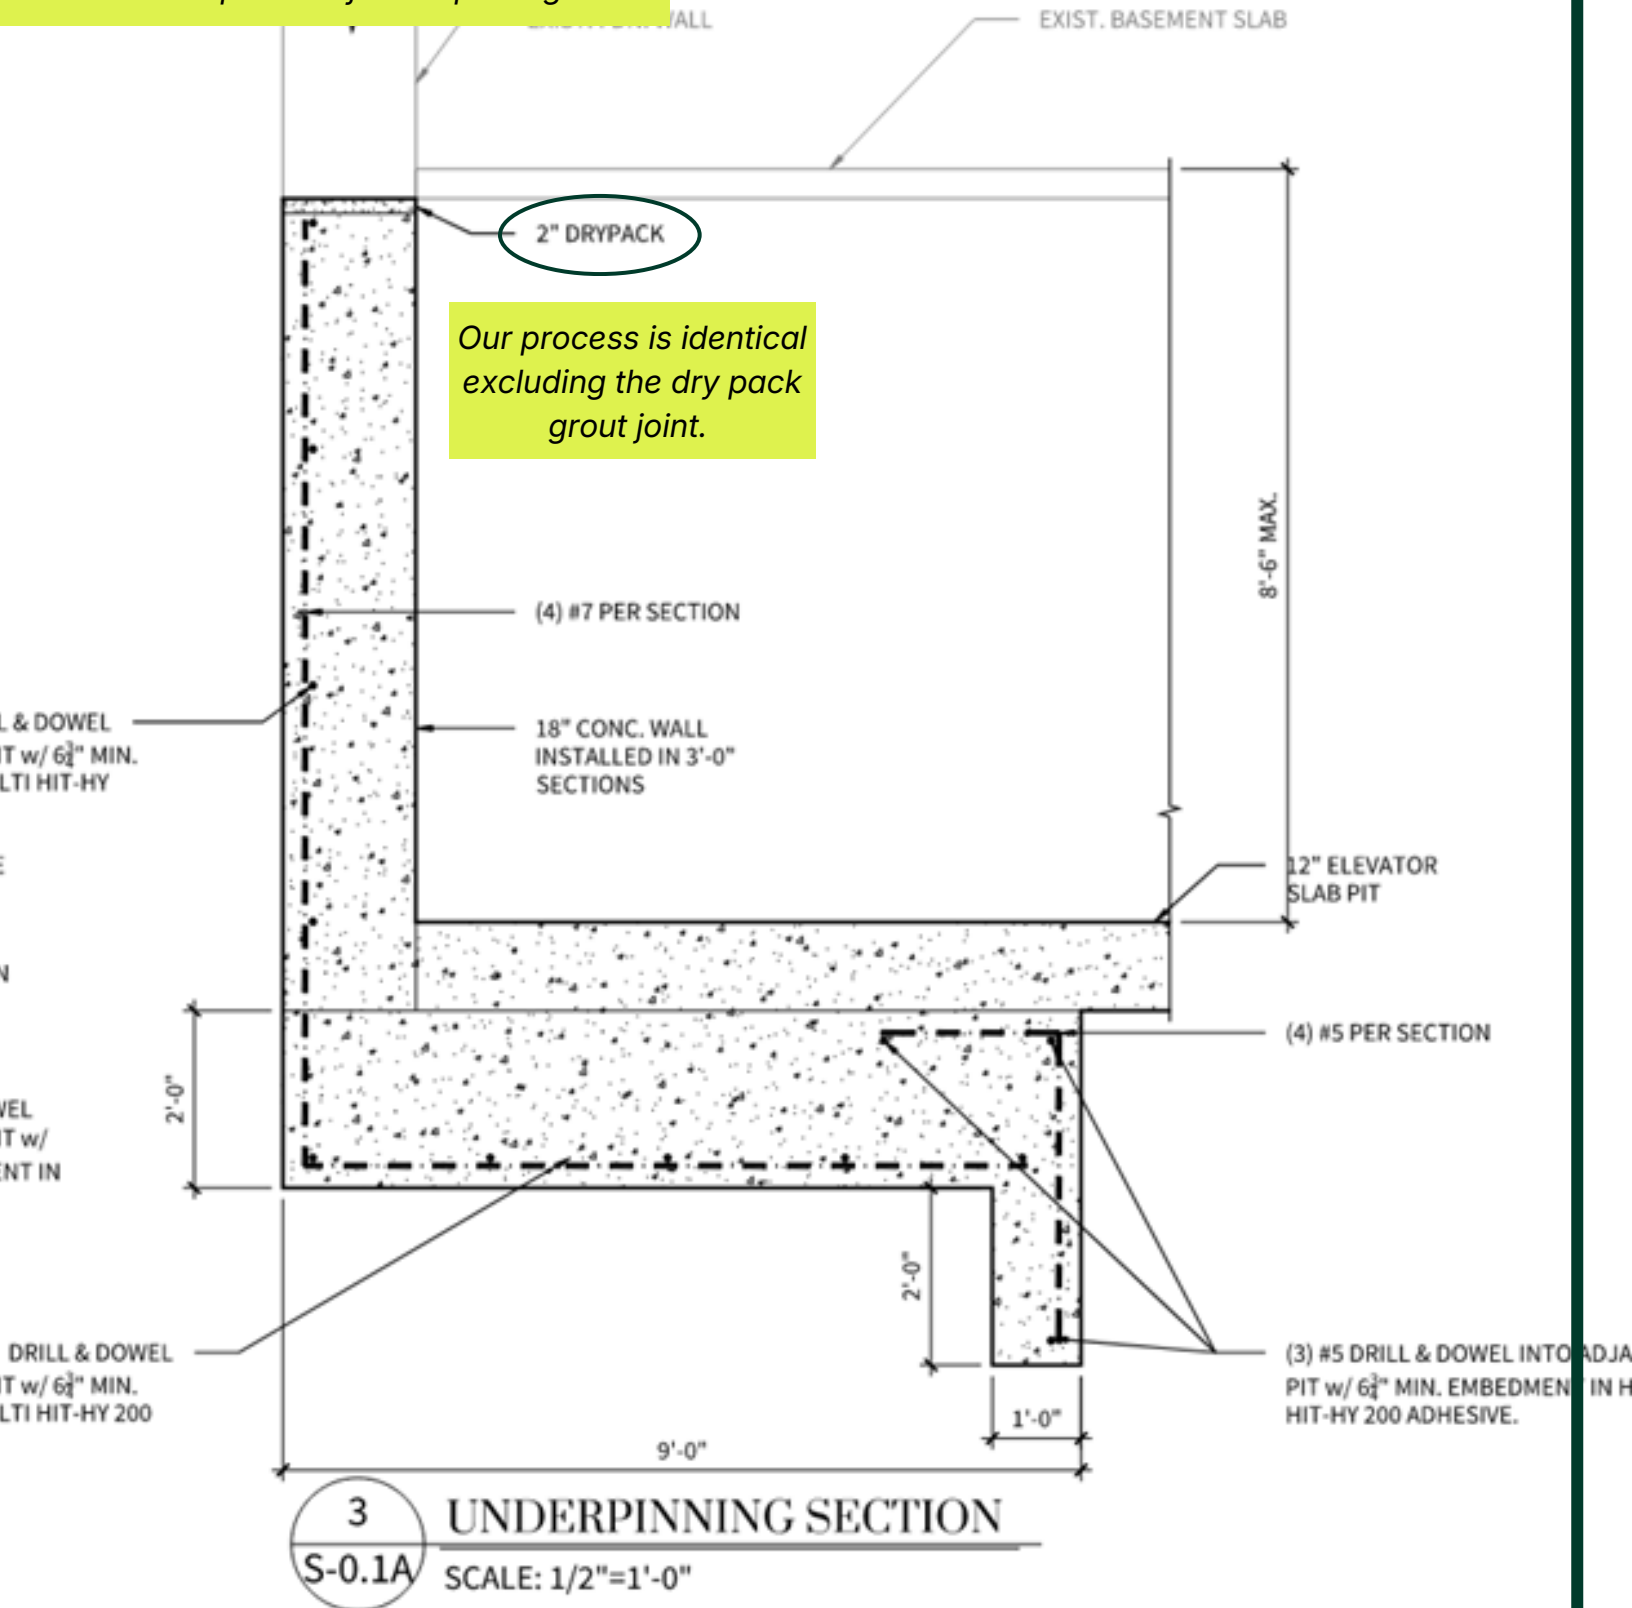

The Design

Results

Entire building underpin

4 MONTHS AHEAD SCHEDULE, COLUMNS SHOT IN ONE DAY

The project was finished 4 months faster than the expected duration with safety increased due to the speed of the underpinning installation. The columns were shot in place to the new elevation in just one day with a flat and smooth finish.

